

---

# **django-import-export Documentation**

*Release 3.0.3.dev0*

**Bojan Mihelac**

**Dec 13, 2022**



<b>1</b>	<b>Installation and configuration</b>	<b>3</b>
1.1	Settings . . . . .	3
1.2	Example app . . . . .	4
<b>2</b>	<b>Getting started</b>	<b>7</b>
2.1	Test data . . . . .	7
2.2	The test models . . . . .	7
2.3	Creating import-export resource . . . . .	8
2.4	Exporting data . . . . .	8
2.5	Customize resource options . . . . .	8
2.6	Declaring fields . . . . .	9
2.7	Advanced data manipulation on export . . . . .	10
2.8	Customize widgets . . . . .	10
2.9	Django Natural Keys . . . . .	11
2.10	Importing data . . . . .	12
2.11	Signals . . . . .	13
2.12	Admin integration . . . . .	13
<b>3</b>	<b>Import data workflow</b>	<b>19</b>
3.1	Transaction support . . . . .	20
<b>4</b>	<b>Bulk imports</b>	<b>21</b>
4.1	Caveats . . . . .	21
4.2	Performance tuning . . . . .	22
<b>5</b>	<b>Using celery to perform imports</b>	<b>23</b>
<b>6</b>	<b>Testing</b>	<b>25</b>
6.1	MySql / Postgres tests . . . . .	25
6.2	Coverage . . . . .	25
6.3	Bulk testing . . . . .	26
<b>7</b>	<b>Changelog</b>	<b>27</b>
7.1	3.0.3 (unreleased) . . . . .	27
7.2	3.0.2 (2022-12-13) . . . . .	27
7.3	3.0.1 (2022-10-18) . . . . .	27
7.4	3.0.0 (2022-10-18) . . . . .	28

7.5	2.9.0 (2022-09-14)	30
7.6	2.8.0 (2022-03-31)	30
7.7	2.7.1 (2021-12-23)	30
7.8	2.7.0 (2021-12-07)	30
7.9	2.6.1 (2021-09-30)	30
7.10	2.6.0 (2021-09-15)	31
7.11	2.5.0 (2020-12-30)	31
7.12	2.4.0 (2020-10-05)	32
7.13	2.3.0 (2020-07-12)	32
7.14	2.2.0 (2020-06-01)	32
7.15	2.1.0 (2020-05-02)	32
7.16	2.0.2 (2020-02-16)	32
7.17	2.0.1 (2020-01-15)	33
7.18	2.0 (2019-12-03)	33
7.19	1.2.0 (2019-01-10)	33
7.20	1.1.0 (2018-10-02)	33
7.21	1.0.1 (2018-05-17)	34
7.22	1.0.0 (2018-02-13)	34
7.23	0.7.0 (2018-01-17)	34
7.24	0.6.1 (2017-12-04)	34
7.25	0.6.0 (2017-11-23)	35
7.26	0.5.1 (2016-09-29)	35
7.27	0.5.0 (2016-09-01)	36
7.28	0.4.5 (2016-04-06)	36
7.29	0.4.4 (2016-03-22)	36
7.30	0.4.3 (2016-03-08)	37
7.31	0.4.2 (2015-12-18)	37
7.32	0.4.1 (2015-12-11)	37
7.33	0.4.0 (2015-12-02)	37
7.34	0.3.1 (2015-11-20)	37
7.35	0.3 (2015-11-20)	37
7.36	0.2.9 (2015-11-12)	37
7.37	0.2.8 (2015-07-29)	38
7.38	0.2.7 (2015-05-04)	38
7.39	0.2.6 (2014-10-09)	38
7.40	0.2.5 (2014-10-04)	38
7.41	0.2.4 (2014-09-18)	38
7.42	0.2.3 (2014-07-01)	39
7.43	0.2.2 (2014-04-18)	39
7.44	0.2.1 (2014-02-20)	39
7.45	0.2.0 (2014-01-30)	39
7.46	0.1.6 (2014-01-21)	39
7.47	0.1.5 (2013-11-29)	39
7.48	0.1.4	39
7.49	0.1.3	40
7.50	0.1.2	40
7.51	0.1.1	40
7.52	0.1.0	40

**8 Admin 41**

**9 Resources 45**

9.1	Resource	45
9.2	ModelResource	48

9.3	ResourceOptions (Meta) . . . . .	49
9.4	modelresource_factory . . . . .	50
<b>10</b>	<b>Widgets</b>	<b>51</b>
<b>11</b>	<b>Fields</b>	<b>57</b>
<b>12</b>	<b>Instance loaders</b>	<b>59</b>
<b>13</b>	<b>Temporary storages</b>	<b>61</b>
13.1	TempFolderStorage . . . . .	61
13.2	CacheStorage . . . . .	61
13.3	MediaStorage . . . . .	61
<b>14</b>	<b>Results</b>	<b>63</b>
14.1	Result . . . . .	63
<b>15</b>	<b>Forms</b>	<b>65</b>
	<b>Python Module Index</b>	<b>67</b>
	<b>Index</b>	<b>69</b>



django-import-export is a Django application and library for importing and exporting data with included admin integration.

**Features:**

- support multiple formats (Excel, CSV, JSON, ... and everything else that `tablib` supports)
- admin integration for importing
- preview import changes
- admin integration for exporting
- export data respecting admin filters

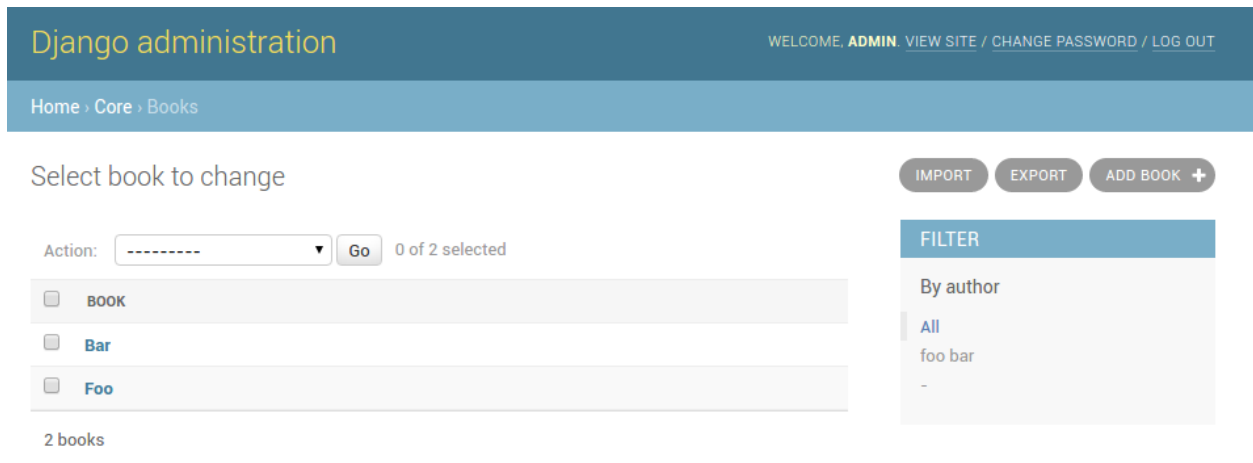


Fig. 1: A screenshot of the change view with Import and Export buttons.





---

## Installation and configuration

---

`django-import-export` is available on the Python Package Index (PyPI), so it can be installed with standard Python tools like `pip` or `easy_install`:

```
$ pip install django-import-export
```

This will automatically install many formats supported by `tablib`. If you need additional formats like `cli` or `Pandas DataFrame`, you should install the appropriate `tablib` dependencies (e.g. `pip install tablib[pandas]`). Read more on the [tablib format documentation page](#).

Alternatively, you can install the git repository directly to obtain the development version:

```
$ pip install -e git+https://github.com/django-import-export/django-import-export.git  
↪#egg=django-import-export
```

Now, you're good to go, unless you want to use `django-import-export` from the admin as well. In this case, you need to add it to your `INSTALLED_APPS` and let Django collect its static files.

```
# settings.py  
INSTALLED_APPS = (  
    ...  
    'import_export',  
)
```

```
$ python manage.py collectstatic
```

All prerequisites are set up! See [Getting started](#) to learn how to use `django-import-export` in your project.

## 1.1 Settings

You can configure the following in your settings file:

### 1.1.1 `IMPORT_EXPORT_USE_TRANSACTIONS`

Controls if resource importing should use database transactions. Defaults to `False`. Using transactions makes imports safer as a failure during import won't import only part of the data set.

Can be overridden on a `Resource` class by setting the `use_transactions` class attribute.

### 1.1.2 `IMPORT_EXPORT_SKIP_ADMIN_LOG`

If set to `True`, skips the creation of admin log entries when importing. Defaults to `False`. This can speed up importing large data sets, at the cost of losing an audit trail.

Can be overridden on a `ModelAdmin` class inheriting from `ImportMixin` by setting the `skip_admin_log` class attribute.

### 1.1.3 `IMPORT_EXPORT_TMP_STORAGE_CLASS`

Controls which storage class to use for storing the temporary uploaded file during imports. Defaults to `import_export.tmp_storages.TempFolderStorage`.

Can be overridden on a `ModelAdmin` class inheriting from `ImportMixin` by setting the `tmp_storage_class` class attribute.

### 1.1.4 `IMPORT_EXPORT_IMPORT_PERMISSION_CODE`

If set, lists the permission code that is required for users to perform the “import” action. Defaults to `None`, which means everybody can perform imports.

Django's built-in permissions have the codes `add`, `change`, `delete`, and `view`. You can also add your own permissions.

### 1.1.5 `IMPORT_EXPORT_EXPORT_PERMISSION_CODE`

If set, lists the permission code that is required for users to perform the “export” action. Defaults to `None`, which means everybody can perform exports.

Django's built-in permissions have the codes `add`, `change`, `delete`, and `view`. You can also add your own permissions.

### 1.1.6 `IMPORT_EXPORT_CHUNK_SIZE`

An integer that defines the size of chunks when iterating a `QuerySet` for data exports. Defaults to `100`. You may be able to save memory usage by decreasing it, or speed up exports by increasing it.

Can be overridden on a `Resource` class by setting the `chunk_size` class attribute.

## 1.2 Example app

There's an example application that showcases what `django-import-export` can do. It's assumed that you have set up a Python `venv` with all required dependencies (from `test.txt` requirements file) and are able to run Django locally.

You can run the example application as follows:

```
cd tests
./manage.py makemigrations
./manage.py migrate
./manage.py createsuperuser
./manage.py loaddata category.json book.json
./manage.py runserver
```

Go to <http://127.0.0.1:8000>

books-sample.csv contains sample book data which can be imported.



## 2.1 Test data

There are test data files which can be used for importing in the `test/core/exports` directory.

## 2.2 The test models

For example purposes, we'll use a simplified book app. Here is our `models.py`:

```
# app/models.py

class Author(models.Model):
    name = models.CharField(max_length=100)

    def __str__(self):
        return self.name

class Category(models.Model):
    name = models.CharField(max_length=100)

    def __str__(self):
        return self.name

class Book(models.Model):
    name = models.CharField('Book name', max_length=100)
    author = models.ForeignKey(Author, blank=True, null=True)
    author_email = models.EmailField('Author email', max_length=75, blank=True)
    imported = models.BooleanField(default=False)
    published = models.DateField('Published', blank=True, null=True)
    price = models.DecimalField(max_digits=10, decimal_places=2, null=True,
    blank=True)
```

(continues on next page)

(continued from previous page)

```
categories = models.ManyToManyField(Category, blank=True)

def __str__(self):
    return self.name
```

## 2.3 Creating import-export resource

To integrate *django-import-export* with our `Book` model, we will create a `ModelResource` class in `admin.py` that will describe how this resource can be imported or exported:

```
# app/admin.py

from import_export import resources
from core.models import Book

class BookResource(resources.ModelResource):

    class Meta:
        model = Book
```

## 2.4 Exporting data

Now that we have defined a `ModelResource` class, we can export books:

```
>>> from app.admin import BookResource
>>> dataset = BookResource().export()
>>> print(dataset.csv)
id,name,author,author_email,imported,published,price,categories
2,Some book,1,,0,2012-12-05,8.85,1
```

## 2.5 Customize resource options

By default `ModelResource` introspects model fields and creates `Field`-attributes with an appropriate `Widget` for each field.

To affect which model fields will be included in an import-export resource, use the `fields` option to whitelist fields:

```
class BookResource(resources.ModelResource):

    class Meta:
        model = Book
        fields = ('id', 'name', 'price',)
```

Or the `exclude` option to blacklist fields:

```
class BookResource(resources.ModelResource):

    class Meta:
        model = Book
        exclude = ('imported', )
```

An explicit order for exporting fields can be set using the `export_order` option:

```
class BookResource(resources.ModelResource):

    class Meta:
        model = Book
        fields = ('id', 'name', 'author', 'price',)
        export_order = ('id', 'price', 'author', 'name')
```

The default field for object identification is `id`, you can optionally set which fields are used as the `id` when importing:

```
class BookResource(resources.ModelResource):

    class Meta:
        model = Book
        import_id_fields = ('isbn',)
        fields = ('isbn', 'name', 'author', 'price',)
```

When defining *ModelResource* fields it is possible to follow model relationships:

```
class BookResource(resources.ModelResource):

    class Meta:
        model = Book
        fields = ('author__name',)
```

---

**Note:** Following relationship fields sets `field` as `readonly`, meaning this field will be skipped when importing data.

---

By default all records will be imported, even if no changes are detected. This can be changed setting the `skip_unchanged` option. Also, the `report_skipped` option controls whether skipped records appear in the import `Result` object, and if using the admin whether skipped records will show in the import preview page:

```
class BookResource(resources.ModelResource):

    class Meta:
        model = Book
        skip_unchanged = True
        report_skipped = False
        fields = ('id', 'name', 'price',)
```

To further customize the resources, you might like to consider overriding the following *ImportMixin* methods: `get_resource_kwargs()`, `get_resource_classes()`, `get_export_resource_kwargs()`,

**See also:**

*Resources*

## 2.6 Declaring fields

It is possible to override a resource field to change some of its options:

```
from import_export.fields import Field

class BookResource(resources.ModelResource):
```

(continues on next page)

(continued from previous page)

```
published = Field(attribute='published', column_name='published_date')

class Meta:
    model = Book
```

Other fields that don't exist in the target model may be added:

```
from import_export.fields import Field

class BookResource(resources.ModelResource):
    myfield = Field(column_name='myfield')

class Meta:
    model = Book
```

**See also:**

*Fields* Available field types and options.

## 2.7 Advanced data manipulation on export

Not all data can be easily extracted from an object/model attribute. In order to turn complicated data model into a (generally simpler) processed data structure on export, `dehydrate_<fieldname>` method should be defined:

```
from import_export.fields import Field

class BookResource(resources.ModelResource):
    full_title = Field()

class Meta:
    model = Book

def dehydrate_full_title(self, book):
    book_name = getattr(book, "name", "unknown")
    author_name = getattr(book.author, "name", "unknown")
    return '%s by %s' % (book_name, author_name)
```

In this case, the export looks like this:

```
>>> from app.admin import BookResource
>>> dataset = BookResource().export()
>>> print(dataset.csv)
full_title,id,name,author,author_email,imported,published,price,categories
Some book by 1,2,Some book,1,,0,2012-12-05,8.85,1
```

## 2.8 Customize widgets

A *ModelResource* creates a field with a default widget for a given field type. If the widget should be initialized with different arguments, set the `widgets` dict.

In this example widget, the `published` field is overridden to use a different date format. This format will be used both for importing and exporting resource.



```
class BookResource(resources.ModelResource):

    class Meta:
        model = Book
        widgets = {
            'published': {'format': '%d.%m.%Y'},
        }
```

**See also:**

*Widgets* available widget types and options.

## 2.9 Django Natural Keys

The `ForeignKeyWidget` also supports using Django's natural key functions. A manager class with the `get_by_natural_key` function is required for importing foreign key relationships by the field model's natural key, and the model must have a `natural_key` function that can be serialized as a JSON list in order to export data.

The primary utility for natural key functionality is to enable exporting data that can be imported into other Django environments with different numerical primary key sequences. The natural key functionality enables handling more complex data than specifying either a single field or the PK.

The example below illustrates how to create a field on the `BookResource` that imports and exports its author relationships using the natural key functions on the `Author` model and `modelmanager`.

The resource `_meta` option `use_natural_foreign_keys` enables this setting for all Models that support it.

```
from import_export.fields import Field
from import_export.widgets import ForeignKeyWidget

class AuthorManager(models.Manager):

    def get_by_natural_key(self, name):
        return self.get(name=name)

class Author(models.Model):

    objects = AuthorManager()

    name = models.CharField(max_length=100)
    birthday = models.DateTimeField(auto_now_add=True)

    def natural_key(self):
        return (self.name,)

# Only the author field uses natural foreign keys.
class BookResource(resources.ModelResource):

    author = Field(
        column_name = "author",
        attribute = "author",
        widget = ForeignKeyWidget(Author, use_natural_foreign_keys=True)
    )

    class Meta:
        model = Book
```

(continues on next page)

(continued from previous page)

```
# All widgets with foreign key functions use them.
class BookResource(resources.ModelResource):

    class Meta:
        model = Book
        use_natural_foreign_keys = True
```

Read more at [Django Serialization](#)

## 2.10 Importing data

Let's import some data!

```
1 >>> import tablib
2 >>> from import_export import resources
3 >>> from core.models import Book
4 >>> book_resource = resources.modelresource_factory(model=Book)()
5 >>> dataset = tablib.Dataset(['', 'New book'], headers=['id', 'name'])
6 >>> result = book_resource.import_data(dataset, dry_run=True)
7 >>> print(result.has_errors())
8 False
9 >>> result = book_resource.import_data(dataset, dry_run=False)
```

In the fourth line we use `modelresource_factory()` to create a default `ModelResource`. The `ModelResource` class created this way is equal to the one shown in the example in section [Creating import-export resource](#).

In fifth line a `Dataset` with columns `id` and `name`, and one book entry, are created. A field for a primary key field (in this case, `id`) always needs to be present.

In the rest of the code we first pretend to import data using `import_data()` and `dry_run` set, then check for any errors and actually import data this time.

**See also:**

[Import data workflow](#) for a detailed description of the import workflow and its customization options.

### 2.10.1 Deleting data

To delete objects during import, implement the `for_delete()` method on your `Resource` class.

The following is an example resource which expects a `delete` field in the dataset. An import using this resource will delete model instances for rows that have their column `delete` set to 1:

```
class BookResource(resources.ModelResource):
    delete = fields.Field(widget=widgets.BooleanWidget())

    def for_delete(self, row, instance):
        return self.fields['delete'].clean(row)

    class Meta:
        model = Book
```

## 2.11 Signals

To hook in the import export workflow, you can connect to `post_import`, `post_export` signals:

```
from django.dispatch import receiver
from import_export.signals import post_import, post_export

@receiver(post_import, dispatch_uid='balabala...')
def _post_import(model, **kwargs):
    # model is the actual model instance which after import
    pass

@receiver(post_export, dispatch_uid='balabala...')
def _post_export(model, **kwargs):
    # model is the actual model instance which after export
    pass
```

## 2.12 Admin integration

### 2.12.1 Exporting

#### Exporting via list filters

Admin integration is achieved by subclassing `ImportExportModelAdmin` or one of the available mixins (`ImportMixin`, `ExportMixin`, `ImportExportMixin`):

```
# app/admin.py
from .models import Book
from import_export.admin import ImportExportModelAdmin

class BookAdmin(ImportExportModelAdmin):
    resource_classes = [BookResource]

admin.site.register(Book, BookAdmin)
```

**Warning:** The `resource_class` parameter was deprecated in *django-import-export* 3.0. Assign list or tuple with `Resource(s)` to `resource_classes` parameter now.

#### Exporting via admin action

Another approach to exporting data is by subclassing `ImportExportActionModelAdmin` which implements export as an admin action. As a result it's possible to export a list of objects selected on the change list page:

```
# app/admin.py
from import_export.admin import ImportExportActionModelAdmin

class BookAdmin(ImportExportActionModelAdmin):
    pass
```

Note that to use the `ExportMixin` or `ExportActionMixin`, you must declare this mixin **before** `admin.ModelAdmin`:

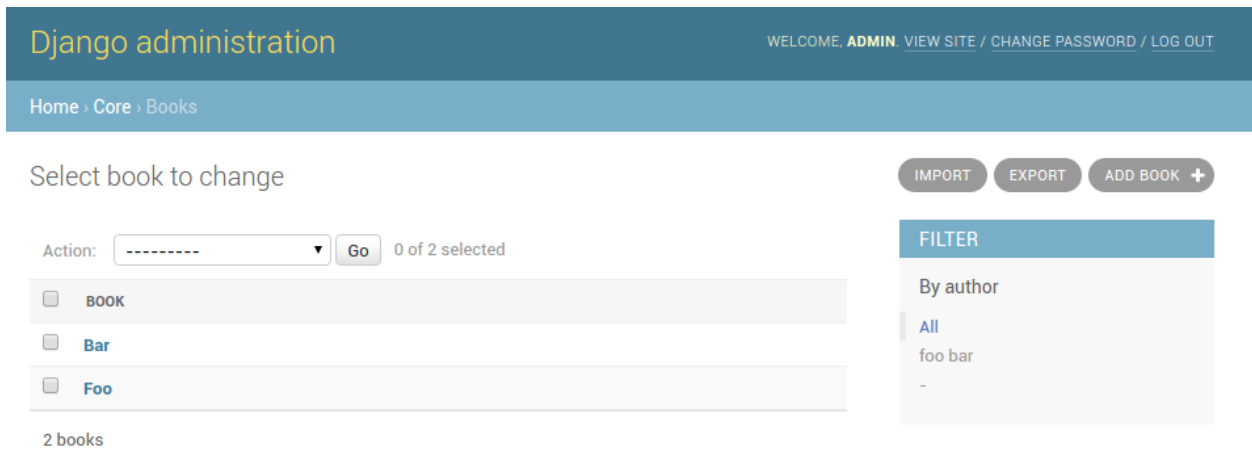


Fig. 1: A screenshot of the change view with Import and Export buttons.

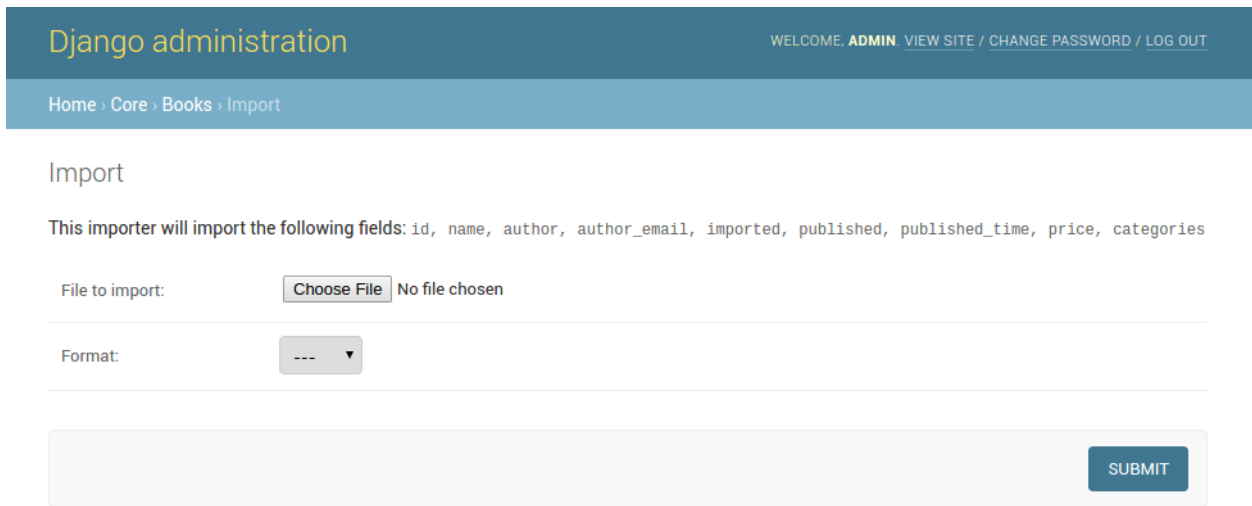


Fig. 2: A screenshot of the import view.

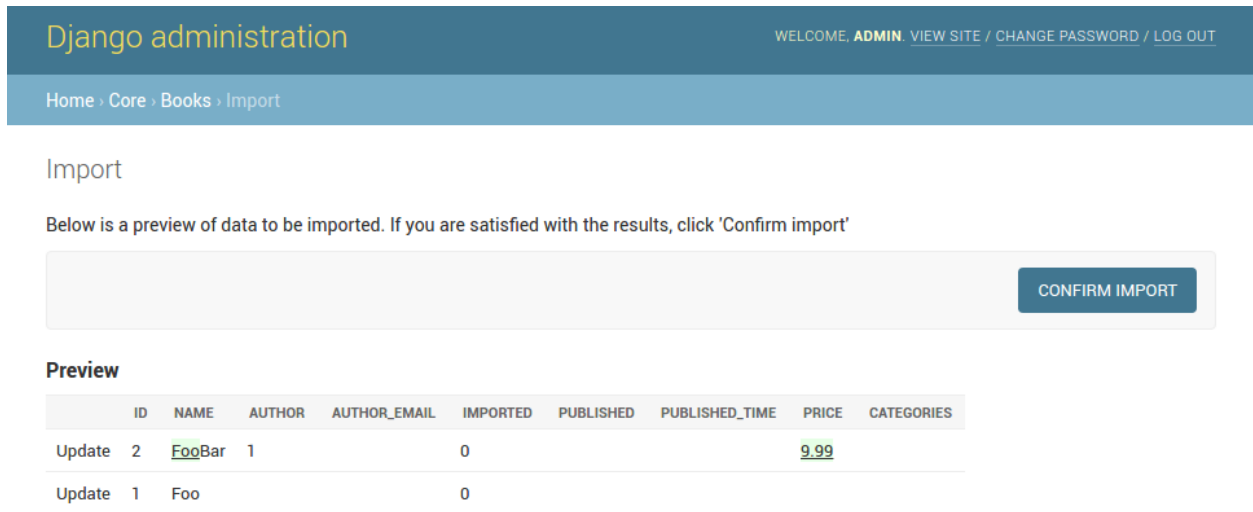


Fig. 3: A screenshot of the confirm import view.

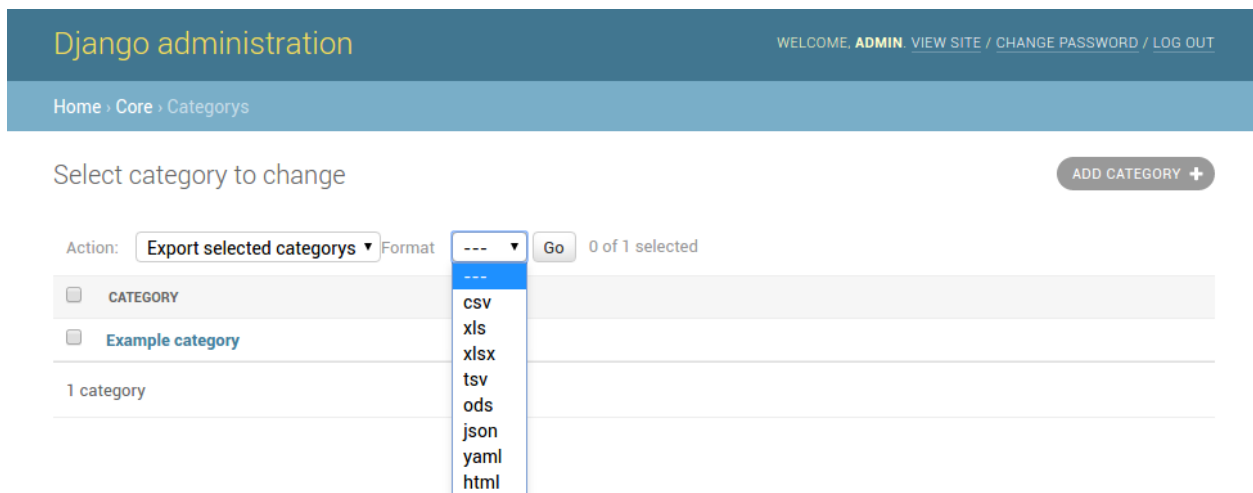


Fig. 4: A screenshot of the change view with Import and Export as an admin action.

```
# app/admin.py
from django.contrib import admin
from import_export.admin import ExportActionMixin

class BookAdmin(ExportActionMixin, admin.ModelAdmin):
    pass
```

Note that *ExportActionMixin* is declared first in the example above!

## 2.12.2 Importing

It is also possible to enable data import via standard Django admin interface. To do this subclass *ImportExportModelAdmin* or use one of the available mixins, i.e. *ImportMixin*, or *ImportExportMixin*. Customizations are, of course, possible.

### Customize admin import forms

It is possible to modify default import forms used in the model admin. For example, to add an additional field in the import form, subclass and extend the *ImportForm* (note that you may want to also consider *ConfirmImportForm* as importing is a two-step process).

To use your customized form(s), change the respective attributes on your *ModelAdmin* class:

- *import\_form\_class*
- *confirm\_form\_class*

For example, imagine you want to import books for a specific author. You can extend the import forms to include author field to select the author from.

Customize forms:

```
from django import forms

class CustomImportForm(ImportForm):
    author = forms.ModelChoiceField(
        queryset=Author.objects.all(),
        required=True)

class CustomConfirmImportForm(ConfirmImportForm):
    author = forms.ModelChoiceField(
        queryset=Author.objects.all(),
        required=True)
```

Customize *ModelAdmin*:

```
class CustomBookAdmin(ImportMixin, admin.ModelAdmin):
    resource_classes = [BookResource]
    import_form_class = CustomImportForm
    confirm_form_class = CustomConfirmImportForm

    def get_confirm_form_initial(self, request, import_form):
        initial = super().get_confirm_form_initial(request, import_form)
        # Pass on the `author` value from the import form to
        # the confirm form (if provided)
        if import_form:
```

(continues on next page)

(continued from previous page)

```
        initial['author'] = import_form.cleaned_data['author']
    return initial

admin.site.register(Book, CustomBookAdmin)
```

To further customize the import forms, you might like to consider overriding the following *ImportMixin* methods: `get_import_form_class()`, `get_import_form_kwargs()`, `get_import_form_initial()`, `get_confirm_form_class()`, `get_confirm_form_kwargs()`,

**Warning:** The `resource_class` parameter was deprecated in *django-import-export* 3.0. Assign list or tuple with Resource(s) to `resource_classes` parameter now.

### See also:

*Admin* available mixins and options.

## Import confirmation

Importing in the Admin site is a two step process.

1. Choose the file to import (*screenshot*).
2. Review changes and confirm import (*screenshot*).

To support this, uploaded data is written to temporary storage after step 1, and read back for final import after step 2.

There are three mechanisms for temporary storage.

1. Temporary file storage on the host server (default). This is suitable for development only. Use of temporary filesystem storage is not recommended for production sites.
2. The Django cache.
3. Django storage.

To modify which storage mechanism is used, please refer to the setting `IMPORT_EXPORT_TMP_STORAGE_CLASS`.

Temporary resources are removed when data is successfully imported after the confirmation step.

Your choice of temporary storage will be influenced by the following factors:

- Sensitivity of the data being imported.
- Volume and frequency of uploads.
- File upload size.
- Use of containers or load-balanced servers.

**Warning:** If users do not complete the confirmation step of the workflow, or if there are errors during import, then temporary resources may not be deleted. This will need to be understood and managed in production settings. For example, using a cache expiration policy or cron job to clear stale resources.

### 2.12.3 Using multiple resources

It is possible to set multiple resources both to import and export *ModelAdmin* classes. The *ImportMixin*, *ExportMixin*, *ImportExportMixin* and *ImportExportModelAdmin* classes accepts subscriptable type (list, tuple, ...) as *resource\_classes* parameter. The subscriptable could also be returned from one of the *get\_resource\_classes()*, *get\_import\_resource\_classes()*, *get\_export\_resource\_classes()* classes.

If there are multiple resources, the resource chooser appears in import/export admin form. The displayed name of the resource can be changed through the *name* parameter of the *Meta* class.

Use multiple resources:

```
from import_export import resources
from core.models import Book

class BookResource(resources.ModelResource):

    class Meta:
        model = Book

class BookNameResource(resources.ModelResource):

    class Meta:
        model = Book
        fields = ('id', 'name')
        name = "Export/Import only book names"

class CustomBookAdmin(ImportMixin, admin.ModelAdmin):
    resource_classes = [BookResource, BookNameResource]
```



---

## Import data workflow

---

This document describes the import data workflow in detail, with hooks that enable customization of the import process. The central aspect of the import process is a resource's `import_data()` method which is explained below.

**`import_data`** (*dataset*, *dry\_run=False*, *raise\_errors=False*)

The `import_data()` method of `Resource` is responsible for importing data from a given dataset.

`dataset` is required and expected to be a `tablib.Dataset` with a header row.

`dry_run` is a Boolean which determines if changes to the database are made or if the import is only simulated. It defaults to `False`.

`raise_errors` is a Boolean. If `True`, import should raise errors. The default is `False`, which means that eventual errors and traceback will be saved in `Result` instance.

This is what happens when the method is invoked:

1. First, a new `Result` instance, which holds errors and other information gathered during the import, is initialized.

Then, an `InstanceLoader` responsible for loading existing instances is initialized. A different `BaseInstanceLoader` can be specified via `ResourceOptions`'s `instance_loader_class` attribute. A `CachedInstanceLoader` can be used to reduce number of database queries. See the [source](#) for available implementations.

2. The `before_import()` hook is called. By implementing this method in your resource, you can customize the import process.

3. Each row of the to-be-imported dataset is processed according to the following steps:

#. The `before_import_row()` hook is called to allow for row data to be modified before it is imported

1. `get_or_init_instance()` is called with current `BaseInstanceLoader` and current row of the dataset, returning an object and a Boolean declaring if the object is newly created or not.

If no object can be found for the current row, `init_instance()` is invoked to initialize an object.

As always, you can override the implementation of `init_instance()` to customize how the new object is created (i.e. set default values).

2. `for_delete()` is called to determine if the passed `instance` should be deleted. In this case, the import process for the current row is stopped at this point.
3. If the instance was not deleted in the previous step, `import_obj()` is called with the `instance` as current object, `row` as current row and `dry_run`.

`import_field()` is called for each field in `Resource` skipping many- to-many fields. Many-to-many fields are skipped because they require instances to have a primary key and therefore assignment is postponed to when the object has already been saved.

`import_field()` in turn calls `save()`, if `Field.attribute` is set and `Field.column_name` exists in the given row.

4. It then is determined whether the newly imported object is different from the already present object and if therefore the given row should be skipped or not. This is handled by calling `skip_row()` with `original` as the original object and `instance` as the current object from the dataset.

If the current row is to be skipped, `row_result.import_type` is set to `IMPORT_TYPE_SKIP`.

5. If the current row is not to be skipped, `save_instance()` is called and actually saves the instance when `dry_run` is not set.

There are two hook methods (that by default do nothing) giving you the option to customize the import process:

- `before_save_instance()`
- `after_save_instance()`

Both methods receive `instance` and `dry_run` arguments.

6. `save_m2m()` is called to save many to many fields.
7. `RowResult` is assigned with a diff between the original and the imported object fields, as well as and `import_type` attribute which states whether the row is new, updated, skipped or deleted.

If an exception is raised during row processing and `import_data()` was invoked with `raise_errors=False` (which is the default) the particular traceback is appended to `RowResult` as well.

If either the row was not skipped or the `Resource` is configured to report skipped rows, the `RowResult` is appended to the `Result`

8. The `after_import_row()` hook is called

4. The `Result` is returned.

## 3.1 Transaction support

If transaction support is enabled, whole import process is wrapped inside transaction and rolledback or committed respectively. All methods called from inside of `import_data(create / delete / update)` receive `False` for `dry_run` argument.

django-import-export provides a 'bulk mode' to improve the performance of importing large datasets.

In normal operation, django-import-export will call `instance.save()` as each row in a dataset is processed. Bulk mode means that `instance.save()` is not called, and instances are instead added to temporary lists. Once the number of rows processed matches the `batch_size` value, then either `bulk_create()` or `bulk_update()` is called.

If `batch_size` is set to `None`, then `bulk_create()` / `bulk_update()` is only called once all rows have been processed.

Bulk deletes are also supported, by applying a `filter()` to the temporary object list, and calling `delete()` on the resulting query set.

### 4.1 Caveats

- The model's `save()` method will not be called, and `pre_save` and `post_save` signals will not be sent.
- `bulk_update()` is only supported in Django 2.2 upwards.
- Bulk operations do not work with many-to-many relationships.
- Take care to ensure that instances are validated before bulk operations are called. This means ensuring that resource fields are declared appropriately with the correct widgets. If an exception is raised by a bulk operation, then that batch will fail. It's also possible that transactions can be left in a corrupted state. Other batches may be successfully persisted, meaning that you may have a partially successful import.
- In bulk mode, exceptions are not linked to a row. Any exceptions raised by bulk operations are logged (and re-raised if `raise_errors` is true).
- If you use `ForeignKeyWidget` then this can affect performance, because it reads from the database for each row. If this is an issue then create a subclass which caches `get_queryset()` results rather than reading for each invocation.

For more information, please read the Django documentation on `bulk_create()` and `bulk_update()`.

## 4.2 Performance tuning

Consider the following if you need to improve the performance of imports.

- Enable `use_bulk` for bulk create, update and delete operations (read *Caveats* first).
- If your import is creating instances only (i.e. you are sure there are no updates), then set `force_init_instance = True`.
- If your import is updating or creating instances, and you have a set of existing instances which can be stored in memory, use *CachedInstanceLoader*
- By default, import rows are compared with the persisted representation, and the difference is stored against each row result. If you don't need this diff, then disable it with `skip_diff = True`.
- Setting `batch_size` to a different value is possible, but tests showed that setting this to `None` always resulted in worse performance in both duration and peak memory.

## CHAPTER 5

---

### Using celery to perform imports

---

You can use the 3rd party [django-import-export-celery](#) application to process long imports in celery.



All tests can be run using `tox` simply by running the `tox` command. By default, tests are run against a local `sqlite2` instance. `pyenv` can be used to manage multiple python installations.

### 6.1 MySql / Postgres tests

By using Docker, you can also run tests against either a MySQL db and/or Postgres.

The `IMPORT_EXPORT_TEST_TYPE` must be set according to the type of tests you wish to run. Set to 'postgres' for postgres tests, and 'mysql-innodb' for mysql tests. If this environment variable is blank (or is any other value) then the default `sqlite2` db will be used.

This process is scripted in `runtests.sh`. Assuming that you have docker installed on your system, running `runtests.sh` will run `tox` against `sqlite2`, `mysql` and `postgres`. You can edit this script to customise testing as you wish.

Note that this is the process which is undertaken by CI builds.

### 6.2 Coverage

Coverage data is written in parallel mode by default (defined in `setup.cfg`). After a `tox` run, you can view coverage data as follows:

```
# combine all coverage data generated by tox into one file
coverage combine

# produce an HTML coverage report
coverage html
```

Check the output of the above commands to locate the coverage HTML file.

## 6.3 Bulk testing

There is a helper script available to generate and profile bulk loads. See `scripts/bulk_import.py`.

You can use this script by configuring environment variables as defined above, and then installing and running the test application. In order to run the helper script, you will need to install `requirements/test.txt`, and then add `django-extensions` to `settings.py` (`INSTALLED_APPS`).

You can then run the script as follows:

```
# run creates, updates, and deletes
./manage.py runscript bulk_import

# pass 'create', 'update' or 'delete' to run the single test
./manage.py runscript bulk_import --script-args create
```



### 7.1 3.0.3 (unreleased)

- Nothing changed yet.

### 7.2 3.0.2 (2022-12-13)

- Support Python 3.11 (#1508)
- use `get_list_select_related` in `ExportMixin` (#1511)
- bugfix: handle crash on start-up when `change_list_template` is a property (#1523)
- bugfix: include instance info in row result when row is skipped (#1526)
- bugfix: add `**kwargs` param to `Resource` constructor (#1527)

### 7.3 3.0.1 (2022-10-18)

- Updated `django-import-export-ci.yml` to fix `node.js` deprecation
- bugfix: `DateTimeWidget.clean()` handles tz aware datetime (#1499)
- Updated translations for v3.0.0 release (#1500)

## 7.4 3.0.0 (2022-10-18)

### 7.4.1 Breaking changes

This release makes some minor changes to the public API. If you have overridden any methods from the `resources` or `widgets` modules, you may need to update your implementation to accommodate these changes.

- **Check value of `ManyToManyField` in `skip_row()` (#1271)**
  - This fixes an issue where `ManyToMany` fields are not checked correctly in `skip_row()`. This means that `skip_row()` now takes `row` as a mandatory arg. If you have overridden `skip_row()` in your own implementation, you will need to add `row` as an arg.
- **Bug fix: validation errors were being ignored when `skip_unchanged` is set (#1378)**
  - If you have overridden `skip_row()` you can choose whether or not to skip rows if validation errors are present. The default behavior is to not skip rows if there are validation errors during import.
- **Use ‘create’ flag instead of `instance.pk` (#1362)**
  - `import_export.resources.save_instance()` now takes an additional mandatory argument: `is_create`. If you have overridden `save_instance()` in your own code, you will need to add this new argument.
- **`widgets`: Unused `*args` params have been removed from method definitions. (#1413)**
  - If you have overridden `clean()` then you should update your method definition to reflect this change.
  - `widgets.ForeignKeyWidget` / `widgets.ManyToManyWidget`: The unused `*args` param has been removed from `__init__()`. If you have overridden `ForeignKeyWidget` or `ManyToManyWidget` you may need to update your implementation to reflect this change.
- **Admin interface: Modified handling of import errors (#1306)**
  - Exceptions raised during the import process are now presented as form errors, instead of being wrapped in a `<H1>` tag in the response. If you have any custom logic which uses the error written directly into the response, then this may need to be changed.
- **ImportForm: improve compatibility with previous signature (#1434)**
  - Previous `ImportForm` implementation was based on Django’s `forms.Form`, if you have any custom `ImportForm` you now need to inherit from `import_export.forms.ImportExportFormBase`.
- **Allow custom `change_list_template` in admin views using mixins (#1483)**
  - If you are using admin mixins from this library in conjunction with code that overrides `change_list_template` (typically admin mixins from other libraries such as `django-admin-sortable2` or `reversion`), object tools in the admin change list views may render differently now.
  - If you have created a custom template which extends any `import_export` template, then this may now cause a recursion error (see #1514)
- **`import.html`: Added blocks to import template (#1488)**
  - If you have made customizations to the import template then you may need to refactor these after the addition of block declarations.

### 7.4.2 Deprecations

This release adds some deprecations which will be removed in a future release.

- **Add support for multiple resources in ModelAdmin. (#1223)**
  - The `*Mixin.resource_class` accepting single resource has been deprecated and the new `*Mixin.resource_classes` accepting subscriptable type (list, tuple, ...) has been added.
  - Same applies to all of the `get_resource_class`, `get_import_resource_class` and `get_export_resource_class` methods.
- Deprecated `exceptions.py` (#1372)
- **Refactored form-related methods on ImportMixin / ExportMixin (#1147)**
  - The following are deprecated: `get_import_form()`, `get_confirm_import_form()`, `get_form_kwargs()`, `get_export_form()`

### 7.4.3 Enhancements

- Default format selections set correctly for export action (#1389)
- Added option to store raw row values in each row's `RowResult` (#1393)
- Add natural key support to `ForeignKeyWidget` (#1371)
- Optimised default instantiation of `CharWidget` (#1414)
- Allow custom `change_list_template` in admin views using mixins (#1483)
- Added blocks to import template (#1488)
- improve compatibility with previous `ImportForm` signature (#1434)
- Refactored form-related methods on `ImportMixin / ExportMixin` (#1147)
- Include custom form media in templates (#1038)
- Remove unnecessary files generated when running tox locally (#1426)

### 7.4.4 Fixes

- Fixed Makefile coverage: added `coverage combine`
- Fixed handling of LF character when using `CacheStorage` (#1417)
- bugfix: `skip_row()` handles M2M field when UUID pk used
- Fix broken link to `tablib` formats page (#1418)
- Fix broken image ref in `README.rst`
- bugfix: `skip_row()` fix crash when model has m2m field and none is provided in upload (#1439)
- Fix deprecation in example application: Added support for transitional form renderer (#1451)

### 7.4.5 Development

- Increased test coverage, refactored CI build to use tox (#1372)

### 7.4.6 Documentation

- Clarified issues around the usage of temporary storage (#1306)

## 7.5 2.9.0 (2022-09-14)

- Fix deprecation in example application: Added support for transitional form renderer (#1451)
- Escape HTML output when rendering decoding errors (#1469)
- Apply `make_aware` when the original file contains actual datetimes (#1478)
- Automatically guess the format of the file when importing (#1460)

## 7.6 2.8.0 (2022-03-31)

- Updated `import.css` to support dark mode (#1318)
- Fix crash when `import_data()` called with empty Dataset and `collect_failed_rows=True` (#1381)
- Improve Korean translation (#1402)
- Update example subclass widget code (#1407)
- Drop support for python3.6, django 2.2, 3.0, 3.1 (#1408)
- Add `get_export_form()` to `ExportMixin` (#1409)

## 7.7 2.7.1 (2021-12-23)

- Removed `django_extensions` from example app settings (#1356)
- Added support for Django 4.0 (#1357)

## 7.8 2.7.0 (2021-12-07)

- Big integer support for Integer widget (#788)
- Run `compilemessages` command to keep `.mo` files in sync (#1299)
- Added `skip_html_diff` meta attribute (#1329)
- Added python3.10 to tox and CI environment list (#1336)
- Add ability to rollback the import on validation error (#1339)
- Fix missing migration on example app (#1346)
- Fix crash when deleting via admin site (#1347)
- Use Github secret in CI script instead of hard-coded password (#1348)
- Documentation: correct error in example application which leads to crash (#1353)

## 7.9 2.6.1 (2021-09-30)

- Revert 'dark mode' css: causes issues in django2.2 (#1330)

## 7.10 2.6.0 (2021-09-15)

- Added guard for null ‘options’ to fix crash (#1325)
- Updated import.css to support dark mode (#1323)
- Fixed regression where overridden mixin methods are not called (#1315)
- Fix xls/xlsx import of Time fields (#1314)
- Added support for ‘to\_encoding’ attribute (#1311)
- Removed travis and replaced with github actions for CI (#1307)
- Increased test coverage (#1286)
- Fix minor date formatting issue for date with years < 1000 (#1285)
- Translate the zh\_Hans missing part (#1279)
- Remove code duplication from mixins.py and admin.py (#1277)
- Fix example in BooleanWidget docs (#1276)
- Better support for Django main (#1272)
- don’t test Django main branch with python36,37 (#1269)
- Support Django 3.2 (#1265)
- Correct typo in Readme (#1258)
- Rephrase logical clauses in docstrings (#1255)
- Support multiple databases (#1254)
- Update django master to django main (#1251)
- Add Farsi translated messages in the locale (#1249)
- Update Russian translations (#1244)
- Append export admin action using ModelAdmin.get\_actions (#1241)
- Fix minor mistake in makemigrations command (#1233)
- Remove EOL Python 3.5 from CI (#1228)
- CachedInstanceLoader defaults to empty when import\_id is missing (#1225)
- Add kwargs to import\_row, import\_object and import\_field (#1190)
- Call load\_workbook() with data\_only flag (#1095)

## 7.11 2.5.0 (2020-12-30)

- Changed the default value for IMPORT\_EXPORT\_CHUNK\_SIZE to 100. (#1196)
- Add translation for Korean (#1218)
- Update linting, CI, and docs.

## 7.12 2.4.0 (2020-10-05)

- Fix deprecated Django 3.1 `Signal (providing_args=...)` usage.
- Fix deprecated Django 3.1 `django.conf.urls.url()` usage.

## 7.13 2.3.0 (2020-07-12)

- Add missing translation keys for all languages (#1144)
- Added missing Portuguese translations (#1145)
- Add kazakh translations (#1161)
- Add bulk operations (#1149)

## 7.14 2.2.0 (2020-06-01)

- Deal with importing a `BooleanField` that actually has `True`, `False`, and `None` values. (#1071)
- Add `row_number` parameter to `before_import_row`, `after_import_row` and `after_import_instance` (#1040)
- Paginate queryset if `Queryset.prefetch_related` is used (#1050)

## 7.15 2.1.0 (2020-05-02)

- Fix `DurationWidget` handling of zero value (#1117)
- Make import diff view only show headers for user visible fields (#1109)
- Make `confirm_form` accessible in `get_import_resource_kwargs` and `get_import_data_kwargs` (#994, #1108)
- Initialize `Decimal` with text value, fix #1035 (#1039)
- Adds meta flag `'skip_diff'` to enable skipping of diff operations (#1045)
- Update docs (#1097, #1114, #1122, #969, #1083, #1093)

## 7.16 2.0.2 (2020-02-16)

- Add support for `tablib >= 1.0` (#1061)
- Add ability to install a subset of `tablib` supported formats and save some automatic dependency installations (needs `tablib >= 1.0`)
- Use `column_name` when checking row for fields (#1056)

## 7.17 2.0.1 (2020-01-15)

- Fix deprecated Django 3.0 function usage (#1054)
- Pin tablib version to not use new major version (#1063)
- Format field is always shown on Django 2.2 (#1007)

## 7.18 2.0 (2019-12-03)

- Removed support for Django < 2.0
- Removed support for Python < 3.5
- feat: Support for Postgres JSONb Field (#904)

## 7.19 1.2.0 (2019-01-10)

- feat: Better surfacing of validation errors in UI / optional model instance validation (#852)
- chore: Use modern setuptools in setup.py (#862)
- chore: Update URLs to use <https://> (#863)
- chore: remove outdated workarounds
- chore: Run SQLite tests with in-memory database
- fix: Change logging level (#832)
- fix: Changed `get_instance()` return val (#842)

## 7.20 1.1.0 (2018-10-02)

- fix: Django2.1 ImportExportModelAdmin export (#797) (#819)
- setup: add django2.1 to test matrix
- JSONWidget for jsonb fields (#803)
- Add ExportActionMixin (#809)
- Add Import Export Permissioning #608 (#804)
- `write_to_tmp_storage()` for `import_action()` (#781)
- follow relationships on ForeignKeyWidget #798
- Update all pypi.python.org URLs to pypi.org
- added test for tsv import
- added unicode support for TSV for python 2
- Added ExportViewMixin (#692)

## 7.21 1.0.1 (2018-05-17)

- Make deep copy of fields from class attr to instance attr (#550)
- Fix #612: NumberWidget.is\_empty() should strip the value if string type (#613)
- Fix #713: last day isn't included in results qs (#779)
- use Python3 compatible MySQL driver in development (#706)
- fix: warning U mode is deprecated in python 3 (#776)
- refactor: easier overriding widgets and default field (#769)
- Updated documentation regarding declaring fields (#735)
- custom js for action form also handles grappelli (#719)
- Use 'verbose\_name' in breadcrumbs to match Django default (#732)
- Add Resource.get\_diff\_class() (#745)
- Fix and add polish translation (#747)
- Restore raise\_errors to before\_import (#749)

## 7.22 1.0.0 (2018-02-13)

- Switch to semver versioning (#687)
- Require Django >= 1.8 (#685)
- upgrade tox configuration (#737)

## 7.23 0.7.0 (2018-01-17)

- skip\_row override example (#702)
- Testing against Django 2.0 should not fail (#709)
- Refactor transaction handling (#690)
- Resolves #703 fields shadowed (#703)
- discourage installation as a zipped egg (#548)
- Fixed middleware settings in test app for Django 2.x (#696)

## 7.24 0.6.1 (2017-12-04)

- Refactors and optimizations (#686, #632, #684, #636, #631, #629, #635, #683)
- Travis tests for Django 2.0.x (#691)



## 7.25 0.6.0 (2017-11-23)

- Refactor import\_row call by using keyword arguments (#585)
- Added {{ block.super }} call in block bodyclass in admin/base\_site.html (#582)
- Add support for the Django DurationField with DurationWidget (#575)
- GitHub bmihelac -> django-import-export Account Update (#574)
- Add intersphinx links to documentation (#572)
- Add Resource.get\_import\_fields() (#569)
- Fixed readme mistake (#568)
- Bugfix/fix m2m widget clean (#515)
- Allow injection of context data for template rendered by import\_action() and export\_action() (#544)
- Bugfix/fix exception in generate\_log\_entries() (#543)
- Process import dataset and result in separate methods (#542)
- Bugfix/fix error in converting exceptions to strings (#526)
- Fix admin integration tests for the new “Import finished...” message, update Czech translations to 100% coverage. (#596)
- Make import form type easier to override (#604)
- Add saves\_null\_values attribute to Field to control whether null values are saved on the object (#611)
- Add Bulgarian translations (#656)
- Add django 1.11 to TravisCI (#621)
- Make Signals code example format correctly in documentation (#553)
- Add Django as requirement to setup.py (#634)
- Update import of reverse for django 2.x (#620)
- Add Django-version classifiers to setup.py’s CLASSIFIERS (#616)
- Some fixes for Django 2.0 (#672)
- Strip whitespace when looking up ManyToMany fields (#668)
- Fix all ResourceWarnings during tests in Python 3.x (#637)
- Remove downloads count badge from README since shields.io no longer supports it for PyPi (#677)
- Add coveralls support and README badge (#678)

## 7.26 0.5.1 (2016-09-29)

- French locale not in pypi (#524)
- Bugfix/fix undefined template variables (#519)

## 7.27 0.5.0 (2016-09-01)

- Hide default value in diff when importing a new instance (#458)
- Append rows to Result object via function call to allow overriding (#462)
- Add `get_resource_kwargs` to allow passing request to resource (#457)
- Expose Django user to `get_export_data()` and `export()` (#447)
- Add `before_export` and `after_export` hooks (#449)
- fire events `post_import`, `post_export` events (#440)
- add `**kwargs` to `export_data / create_dataset`
- Add `before_import_row()` and `after_import_row()` (#452)
- Add `get_export_fields()` to Resource to control what fields are exported (#461)
- Control user-visible fields (#466)
- Fix diff for models using `ManyRelatedManager`
- Handle already cleaned objects (#484)
- Add `after_import_instance` hook (#489)
- Use optimized xlsx reader (#482)
- Adds `resource_class` of `BookResource` (re-adds) in admin docs (#481)
- Require POST method for `process_import()` (#478)
- Add `SimpleArrayWidget` to support use of `django.contrib.postgres.fields.ArrayField` (#472)
- Add new Diff class (#477)
- Fix #375: add row to `widget.clean()`, obj to `widget.render()` (#479)
- Restore transactions for data import (#480)
- Refactor the import-export templates (#496)
- Update doc links to the stable version, update rtd to .io (#507)
- Fixed typo in the Czech translation (#495)

## 7.28 0.4.5 (2016-04-06)

- Add `FloatWidget`, use with model fields `models.FloatField` (#433)
- Fix default values in fields (#431, #364)

Field constructor `default` argument is `NOT_PROVIDED` instead of `None` Field `clean` method checks value against `Field.empty_values` [`None`, `''`]

## 7.29 0.4.4 (2016-03-22)

- FIX: No static/ when installed via pip #427
- Add total # of imports and total # of updates to import success msg

## 7.30 0.4.3 (2016-03-08)

- fix MediaStorage does not respect the read\_mode parameter (#416)
- Reset SQL sequences when new objects are imported (#59)
- Let Resource rollback if import throws exception (#377)
- Fixes error when a single value is stored in m2m relation field (#177)
- Add support for django.db.models.TimeField (#381)

## 7.31 0.4.2 (2015-12-18)

- add xlsx import support

## 7.32 0.4.1 (2015-12-11)

- fix for fields with a dynamic default callable (#360)

## 7.33 0.4.0 (2015-12-02)

- Add Django 1.9 support
- Django 1.4 is not supported (#348)

## 7.34 0.3.1 (2015-11-20)

- FIX: importing csv in python 3

## 7.35 0.3 (2015-11-20)

- FIX: importing csv UnicodeEncodeError introduced in 0.2.9 (#347)

## 7.36 0.2.9 (2015-11-12)

- Allow Field.save() relation following (#344)
- Support default values on fields (and models) (#345)
- m2m widget: allow trailing comma (#343)
- Open csv files as text and not binary (#127)

## 7.37 0.2.8 (2015-07-29)

- use the IntegerWidget for database-fields of type BigIntegerField (#302)
- make datetime timezone aware if USE\_TZ is True (#283).
- Fix 0 is interpreted as None in number widgets (#274)
- add possibility to override tmp storage class (#133, #251)
- better error reporting (#259)

## 7.38 0.2.7 (2015-05-04)

- Django 1.8 compatibility
- add attribute inheritance to Resource (#140)
- make the filename and user available to import\_data (#237)
- Add to\_encoding functionality (#244)
- Call before\_import before creating the instance\_loader - fixes #193

## 7.39 0.2.6 (2014-10-09)

- added use of get\_diff\_headers method into import.html template (#158)
- Try to use OrderedDict instead of SortedDict, which is deprecated in Django 1.7 (#157)
- fixed #105 unicode import
- remove invalid form action “form\_url” #154

## 7.40 0.2.5 (2014-10-04)

- Do not convert numeric types to string (#149)
- implement export as an admin action (#124)

## 7.41 0.2.4 (2014-09-18)

- fix: get\_value raised attribute error on model method call
- Fixed XLS import on python 3. Optimized loop
- Fixed properly skipping row marked as skipped when importing data from the admin interface.
- Allow Resource.export to accept iterables as well as querysets
- Improve error messages
- FIX: Properly handle NullBooleanField (#115) - Backward Incompatible Change previously None values were handled as false

## 7.42 0.2.3 (2014-07-01)

- Add separator and field keyword arguments to ManyToManyWidget
- FIX: No support for dates before 1900 (#93)

## 7.43 0.2.2 (2014-04-18)

- RowResult now stores exception object rather than it's repr
- Admin integration - add EntryLog object for each added/updated/deleted instance

## 7.44 0.2.1 (2014-02-20)

- FIX import\_file\_name form field can be use to access the filesystem (#65)

## 7.45 0.2.0 (2014-01-30)

- Python 3 support

## 7.46 0.1.6 (2014-01-21)

- Additional hooks for customizing the workflow (#61)

## 7.47 0.1.5 (2013-11-29)

- Prevent queryset caching when exporting (#44)
- Allow unchanged rows to be skipped when importing (#30)
- Update tests for Django 1.6 (#57)
- Allow different ResourceClass to be used in ImportExportModelAdmin (#49)

## 7.48 0.1.4

- Use field\_name instead of column\_name for field dehydration, FIX #36
- Handle OneToOneField, FIX #17 - Exception when attempting access something on the related\_name.
- FIX #23 - export filter not working

## 7.49 0.1.3

- Fix packaging
- DB transactions support for importing data

## 7.50 0.1.2

- support for deleting objects during import
- bug fixes
- Allowing a field to be 'dehydrated' with a custom method
- added documentation

## 7.51 0.1.1

- added ExportForm to admin integration for choosing export file format
- refactor admin integration to allow better handling of specific formats supported features and better handling of reading text files
- include all available formats in Admin integration
- bugfixes

## 7.52 0.1.0

- Refactor api

For instructions on how to use the models and mixins in this module, please refer to *Admin integration*.

```
class import_export.admin.ExportActionMixin (*args, **kwargs)
```

Mixin with export functionality implemented as an admin action.

```
    export_admin_action (request, queryset)
```

Exports the selected rows using file\_format.

```
    get_actions (request)
```

Adds the export action to the list of available actions.

```
class import_export.admin.ExportActionModelAdmin (*args, **kwargs)
```

Subclass of ModelAdmin with export functionality implemented as an admin action.

```
class import_export.admin.ExportMixin (*args, **kwargs)
```

Export mixin.

This is intended to be mixed with `django.contrib.admin.ModelAdmin` <https://docs.djangoproject.com/en/dev/ref/contrib/admin/>

```
    export_form_class
```

alias of `import_export.forms.ExportForm`

```
    export_template_name = 'admin/import_export/export.html'
```

template for export view

```
    get_export_data (file_format, queryset, *args, **kwargs)
```

Returns file\_format representation for given queryset.

```
    get_export_form ()
```

Deprecated since version 3.0: Use `get_export_form_class()` or set the new `export_form_class` attribute.

```
    get_export_form_class ()
```

Get the form class used to read the export format.

```
    get_export_queryset (request)
```

Returns export queryset.

Default implementation respects applied search and filters.

**has\_export\_permission** (*request*)

Returns whether a request has export permission.

**import\_export\_change\_list\_template** = 'admin/import\_export/change\_list\_export.html'  
 template for change\_list view

**to\_encoding** = None  
 export data encoding

**class** import\_export.admin.**ImportExportActionModelAdmin** (\*args, \*\*kwargs)

Subclass of ExportActionModelAdmin with import/export functionality. Export functionality is implemented as an admin action.

**class** import\_export.admin.**ImportExportMixin** (\*args, \*\*kwargs)

Import and export mixin.

**import\_export\_change\_list\_template** = 'admin/import\_export/change\_list\_import\_export.html'  
 template for change\_list view

**class** import\_export.admin.**ImportExportModelAdmin** (\*args, \*\*kwargs)

Subclass of ModelAdmin with import/export functionality.

**class** import\_export.admin.**ImportMixin** (\*args, \*\*kwargs)

Import mixin.

This is intended to be mixed with django.contrib.admin.ModelAdmin <https://docs.djangoproject.com/en/dev/ref/contrib/admin/>

**confirm\_form\_class**

alias of *import\_export.forms.ConfirmImportForm*

**create\_confirm\_form** (*request*, *import\_form=None*)

New in version 3.0.

Return a form instance to use for the 'confirm' import step. This method can be extended to make dynamic form updates to the form after it has been instantiated. You might also look to override the following:

- *get\_confirm\_form\_class()*
- *get\_confirm\_form\_kwargs()*
- *get\_confirm\_form\_initial()*

**create\_import\_form** (*request*)

New in version 3.0.

Return a form instance to use for the 'initial' import step. This method can be extended to make dynamic form updates to the form after it has been instantiated. You might also look to override the following:

- *get\_import\_form\_class()*
- *get\_import\_form\_kwargs()*
- *get\_import\_form\_initial()*
- *get\_import\_resource\_classes()*

**formats** = [**<class 'import\_export.formats.base\_formats.CSV'>**, **<class 'import\_export.formats.base\_formats.CSV'>**,  
 available import formats

**from\_encoding** = 'utf-8-sig'  
 import data encoding



**get\_confirm\_form\_class** (*request*)

New in version 3.0.

Return the form class to use for the ‘confirm’ import step. If you only have a single custom form class, you can set the `confirm_form_class` attribute to change this for your subclass.

**get\_confirm\_form\_initial** (*request, import\_form*)

New in version 3.0.

Return a dictionary of initial field values to be provided to the ‘confirm’ form.

**get\_confirm\_form\_kwargs** (*request, import\_form=None*)

New in version 3.0.

Return a dictionary of values with which to initialize the ‘confirm’ form (including the initial values returned by `get_confirm_form_initial()`).

**get\_confirm\_import\_form** ()

Deprecated since version 3.0: Use `get_confirm_form_class()` or set the new `confirm_form_class` attribute.

**get\_form\_kwargs** (*form, \*args, \*\*kwargs*)

Deprecated since version 3.0: Use `get_import_form_kwargs()` or `get_confirm_form_kwargs()` instead, depending on which form you wish to customise.

**get\_import\_data\_kwargs** (*request, \*args, \*\*kwargs*)

Prepare kwargs for `import_data`.

**get\_import\_form** ()

Deprecated since version 3.0: Use `get_import_form_class()` or set the new `import_form_class` attribute.

**get\_import\_form\_class** (*request*)

New in version 3.0.

Return the form class to use for the ‘import’ step. If you only have a single custom form class, you can set the `import_form_class` attribute to change this for your subclass.

**get\_import\_form\_initial** (*request*)

New in version 3.0.

Return a dictionary of initial field values to be provided to the ‘import’ form.

**get\_import\_form\_kwargs** (*request*)

New in version 3.0.

Return a dictionary of values with which to initialize the ‘import’ form (including the initial values returned by `get_import_form_initial()`).

**has\_import\_permission** (*request*)

Returns whether a request has import permission.

**import\_action** (*request, \*args, \*\*kwargs*)

Perform a `dry_run` of the import to make sure the import will not result in errors. If there are no errors, save the user uploaded file to a local temp file that will be used by ‘`process_import`’ for the actual import.

**import\_export\_change\_list\_template** = `'admin/import_export/change_list_import.html'`  
template for `change_list` view

**import\_form\_class**

alias of `import_export.forms.ImportForm`

**import\_template\_name** = `'admin/import_export/import.html'`

template for `import` view

**process\_import** (*request*, \**args*, \*\**kwargs*)

Perform the actual import action (after the user has confirmed the import)

## 9.1 Resource

**class** `import_export.resources.Resource` (*\*\*kwargs*)

Resource defines how objects are mapped to their import and export representations and handle importing and exporting data.

**after\_delete\_instance** (*instance, dry\_run*)

Override to add additional logic. Does nothing by default.

**after\_export** (*queryset, data, \*args, \*\*kwargs*)

Override to add additional logic. Does nothing by default.

**after\_import** (*dataset, result, using\_transactions, dry\_run, \*\*kwargs*)

Override to add additional logic. Does nothing by default.

**after\_import\_instance** (*instance, new, row\_number=None, \*\*kwargs*)

Override to add additional logic. Does nothing by default.

**after\_import\_row** (*row, row\_result, row\_number=None, \*\*kwargs*)

Override to add additional logic. Does nothing by default.

**after\_save\_instance** (*instance, using\_transactions, dry\_run*)

Override to add additional logic. Does nothing by default.

**before\_delete\_instance** (*instance, dry\_run*)

Override to add additional logic. Does nothing by default.

**before\_export** (*queryset, \*args, \*\*kwargs*)

Override to add additional logic. Does nothing by default.

**before\_import** (*dataset, using\_transactions, dry\_run, \*\*kwargs*)

Override to add additional logic. Does nothing by default.

**before\_import\_row** (*row, row\_number=None, \*\*kwargs*)

Override to add additional logic. Does nothing by default.

**before\_save\_instance** (*instance, using\_transactions, dry\_run*)  
 Override to add additional logic. Does nothing by default.

**bulk\_create** (*using\_transactions, dry\_run, raise\_errors, batch\_size=None*)  
 Creates objects by calling `bulk_create`.

**bulk\_delete** (*using\_transactions, dry\_run, raise\_errors*)  
 Deletes objects by filtering on a list of instances to be deleted, then calling `delete()` on the entire queryset.

**bulk\_update** (*using\_transactions, dry\_run, raise\_errors, batch\_size=None*)  
 Updates objects by calling `bulk_update`.

**delete\_instance** (*instance, using\_transactions=True, dry\_run=False*)  
 Calls `instance.delete()` as long as `dry_run` is not set. If `use_bulk` then instances are appended to a list for bulk import.

**export** (*queryset=None, \*args, \*\*kwargs*)  
 Exports a resource.

**for\_delete** (*row, instance*)  
 Returns `True` if `row` importing should delete instance.  
 Default implementation returns `False`. Override this method to handle deletion.

**get\_bulk\_update\_fields** ()  
 Returns the fields to be included in calls to `bulk_update()`. `import_id_fields` are removed because `id` fields cannot be supplied to `bulk_update()`.

**classmethod get\_diff\_class** ()  
 Returns the class used to display the diff for an imported instance.

**get\_diff\_headers** ()  
 Diff representation headers.

**classmethod get\_error\_result\_class** ()  
 Returns the class used to store an error resulting from an import.

**get\_field\_name** (*field*)  
 Returns the field name for a given field.

**get\_fields** (*\*\*kwargs*)  
 Returns fields sorted according to `export_order`.

**get\_import\_id\_fields** ()

**get\_instance** (*instance\_loader, row*)  
 If all 'import\_id\_fields' are present in the dataset, calls the `InstanceLoader`. Otherwise, returns `None`.

**get\_or\_init\_instance** (*instance\_loader, row*)  
 Either fetches an already existing instance or initializes a new one.

**classmethod get\_result\_class** ()  
 Returns the class used to store the result of an import.

**classmethod get\_row\_result\_class** ()  
 Returns the class used to store the result of a row import.

**import\_data** (*dataset, dry\_run=False, raise\_errors=False, use\_transactions=None, collect\_failed\_rows=False, rollback\_on\_validation\_errors=False, \*\*kwargs*)  
 Imports data from `tablib.Dataset`. Refer to *Import data workflow* for a more complete description of the whole import process.

#### Parameters

- **dataset** – A `tablib.Dataset`
- **raise\_errors** – Whether errors should be printed to the end user or raised regularly.
- **use\_transactions** – If `True` the import process will be processed inside a transaction.
- **collect\_failed\_rows** – If `True` the import process will collect failed rows.
- **rollback\_on\_validation\_errors** – If both `use_transactions` and `rollback_on_validation_errors` are set to `True`, the import process will be rolled back in case of `ValidationError`.
- **dry\_run** – If `dry_run` is set, or an error occurs, if a transaction is being used, it will be rolled back.

**import\_field** (*field, obj, data, is\_m2m=False, \*\*kwargs*)

Calls `import_export.fields.Field.save()` if `Field.attribute` is specified, and `Field.column_name` is found in `data`.

**import\_obj** (*obj, data, dry\_run, \*\*kwargs*)

Traverses every field in this Resource and calls `import_field()`. If `import_field()` results in a `ValueError` being raised for one of more fields, those errors are captured and reraised as a single, multi-field `ValidationError`.

**import\_row** (*row, instance\_loader, using\_transactions=True, dry\_run=False, raise\_errors=False, \*\*kwargs*)

Imports data from `tablib.Dataset`. Refer to [Import data workflow](#) for a more complete description of the whole import process.

#### Parameters

- **row** – A dict of the row to import
- **instance\_loader** – The instance loader to be used to load the row
- **using\_transactions** – If `using_transactions` is set, a transaction is being used to wrap the import
- **dry\_run** – If `dry_run` is set, or error occurs, transaction will be rolled back.

**init\_instance** (*row=None*)

Initializes an object. Implemented in `import_export.resources.ModelResource.init_instance()`.

**save\_instance** (*instance, is\_create, using\_transactions=True, dry\_run=False*)

Takes care of saving the object to the database.

Objects can be created in bulk if `use_bulk` is enabled.

#### Parameters

- **instance** – The instance of the object to be persisted.
- **is\_create** – A boolean flag to indicate whether this is a new object

to be created, or an existing object to be updated. :param `using_transactions`: A flag to indicate whether db transactions are used. :param `dry_run`: A flag to indicate dry-run mode.

**save\_m2m** (*obj, data, using\_transactions, dry\_run*)

Saves m2m fields.

Model instance need to have a primary key value before a many-to-many relationship can be used.

**skip\_row** (*instance, original, row, import\_validation\_errors=None*)

Returns `True` if row importing should be skipped.

Default implementation returns `False` unless `skip_unchanged == True` and `skip_diff == False`.

If `skip_diff` is `True`, then no comparisons can be made because `original` will be `None`.

When left unspecified, `skip_diff` and `skip_unchanged` both default to `False`, and rows are never skipped.

By default, rows are not skipped if validation errors have been detected during import. You can change this behavior and choose to ignore validation errors by overriding this method.

Override this method to handle skipping rows meeting certain conditions.

Use `super` if you want to preserve default handling while overriding

```
class YourResource(ModelResource):
    def skip_row(self, instance, original, row, import_validation_
↵errors=None):
        # Add code here
        return super().skip_row(instance, original, row, import_validation_
↵errors=import_validation_errors)
```

**validate\_instance** (*instance, import\_validation\_errors=None, validate\_unique=True*)

Takes any validation errors that were raised by `import_obj()`, and combines them with validation errors raised by the instance's `full_clean()` method. The combined errors are then re-raised as single, multi-field `ValidationError`.

If the `clean_model_instances` option is `False`, the instances's `full_clean()` method is not called, and only the errors raised by `import_obj()` are re-raised.

## 9.2 ModelResource

**class** `import_export.resources.ModelResource` (*\*\*kwargs*)

`ModelResource` is `Resource` subclass for handling Django models.

**DEFAULT\_RESOURCE\_FIELD**

alias of `import_export.fields.Field`

**after\_import** (*dataset, result, using\_transactions, dry\_run, \*\*kwargs*)

Reset the SQL sequences after new objects are imported

**classmethod** `field_from_django_field` (*field\_name, django\_field, readonly*)

Returns a `Resource Field` instance for the given Django model field.

**classmethod** `get_fk_widget` (*field*)

Prepare widget for fk and o2o fields

**classmethod** `get_m2m_widget` (*field*)

Prepare widget for m2m field

**get\_queryset** ()

Returns a queryset of all objects for this model. Override this if you want to limit the returned queryset.

**init\_instance** (*row=None*)

Initializes a new Django model.

**classmethod** `widget_from_django_field` (*f, default=<class 'im-*  
*port\_export.widgets.Widget'>*)

Returns the widget that would likely be associated with each Django type.

Includes mapping of Postgres Array field. In the case that `psycopy2` is not installed, we consume the error and process the field regardless.

**classmethod** `widget_kwargs_for_field` (*field\_name*)

Returns widget kwargs for given `field_name`.

## 9.3 ResourceOptions (Meta)

**class** `import_export.resources.ResourceOptions`

The inner Meta class allows for class-level configuration of how the Resource should behave. The following options are available:

**batch\_size = 1000**

The `batch_size` parameter controls how many objects are created in a single query. The default is to create objects in batches of 1000. See `bulk_create()`. This parameter is only used if `use_bulk` is `True`.

**chunk\_size = None**

Controls the `chunk_size` argument of `Queryset.iterator` or, if `prefetch_related` is used, the `per_page` attribute of `Paginator`.

**clean\_model\_instances = False**

Controls whether `instance.full_clean()` is called during the import process to identify potential validation errors for each (non skipped) row. The default value is `False`.

**exclude = None**

Controls what introspected fields the Resource should NOT include. A blacklist of fields.

**export\_order = None**

Controls export order for columns.

**fields = None**

Controls what introspected fields the Resource should include. A whitelist of fields.

**force\_init\_instance = False**

If `True`, this parameter will prevent imports from checking the database for existing instances. Enabling this parameter is a performance enhancement if your import dataset is guaranteed to contain new instances.

**import\_id\_fields = ['id']**

Controls which object fields will be used to identify existing instances.

**instance\_loader\_class = None**

Controls which class instance will take care of loading existing objects.

**model = None**

Django Model class. It is used to introspect available fields.

**report\_skipped = True**

Controls if the result reports skipped rows. Default value is `True`

**skip\_diff = False**

Controls whether or not an instance should be diffed following import. By default, an instance is copied prior to insert, update or delete. After each row is processed, the instance's copy is diffed against the original, and the value stored in each `RowResult`. If diffing is not required, then disabling the diff operation by setting this value to `True` improves performance, because the copy and comparison operations are skipped for each row. If enabled, then `skip_row()` checks do not execute, because 'skip' logic requires comparison between the stored and imported versions of a row. If enabled, then HTML row reports are also not generated (see `skip_html_diff`). The default value is `False`.

**skip\_html\_diff = False**

Controls whether or not a HTML report is generated after each row. By default, the difference between a stored copy and an imported instance is generated in HTML form and stored in each `RowResult`. The HTML report is used to present changes on the confirmation screen in the admin site, hence when this value is `True`, then changes will not be presented on the confirmation screen. If the HTML report is not required, then setting this value to `True` improves performance, because the HTML generation is skipped for each row. This is a useful optimization when importing large datasets. The default value is `False`.

**skip\_unchanged = False**

Controls if the import should skip unchanged records. Default value is `False`

**store\_row\_values = False**

If `True`, each row's raw data will be stored in each row result. Enabling this parameter will increase the memory usage during import which should be considered when importing large datasets.

**use\_bulk = False**

Controls whether import operations should be performed in bulk. By default, an object's `save()` method is called for each row in a data set. When bulk is enabled, objects are saved using bulk operations.

**use\_natural\_foreign\_keys = False**

If `True`, `use_natural_foreign_keys = True` will be passed to all foreign key widget fields whose models support natural foreign keys. That is, the model has a `natural_key` function and the manager has a `get_by_natural_key` function.

**use\_transactions = None**

Controls if import should use database transactions. Default value is `None` meaning settings. `IMPORT_EXPORT_USE_TRANSACTIONS` will be evaluated.

**using\_db = None**

DB Connection name to use for db transactions. If not provided, `router.db_for_write(model)` will be evaluated and if it's missing, `DEFAULT_DB_ALIAS` constant ("default") is used.

**widgets = None**

This dictionary defines widget kwargs for fields.

## 9.4 modelresource\_factory

`resources.modelresource_factory` (*resource\_class=<class 'import\_export.resources.ModelResource'>*)  
Factory for creating `ModelResource` class for given Django model.



**class** `import_export.widgets.Widget`

A `Widget` takes care of converting between import and export representations.

This is achieved by the two methods, `clean()` and `render()`.

**clean** (*value*, *row=None*, *\*\*kwargs*)

Returns an appropriate Python object for an imported value.

For example, if you import a value from a spreadsheet, `clean()` handles conversion of this value into the corresponding Python object.

Numbers or dates can be *cleaned* to their respective data types and don't have to be imported as Strings.

**render** (*value*, *obj=None*)

Returns an export representation of a Python value.

For example, if you have an object you want to export, `render()` takes care of converting the object's field to a value that can be written to a spreadsheet.

**class** `import_export.widgets.IntegerWidget`

Widget for converting integer fields.

**clean** (*value*, *row=None*, *\*\*kwargs*)

Returns an appropriate Python object for an imported value.

For example, if you import a value from a spreadsheet, `clean()` handles conversion of this value into the corresponding Python object.

Numbers or dates can be *cleaned* to their respective data types and don't have to be imported as Strings.

**class** `import_export.widgets.DecimalWidget`

Widget for converting decimal fields.

**clean** (*value*, *row=None*, *\*\*kwargs*)

Returns an appropriate Python object for an imported value.

For example, if you import a value from a spreadsheet, `clean()` handles conversion of this value into the corresponding Python object.

Numbers or dates can be *cleaned* to their respective data types and don't have to be imported as Strings.

**class** `import_export.widgets.CharWidget`  
 Widget for converting text fields.

**class** `import_export.widgets.BooleanWidget`  
 Widget for converting boolean fields.

The widget assumes that `True`, `False`, and `None` are all valid values, as to match Django's `BooleanField`. That said, whether the database/Django will actually accept NULL values will depend on if you have set `null=True` on that Django field.

While the `BooleanWidget` is set up to accept as input common variations of "True" and "False" (and "None"), you may need to munge less common values to `True/False/None`. Probably the easiest way to do this is to override the `before_import_row()` function of your Resource class. A short example:

```
from import_export import fields, resources, widgets

class BooleanExample(resources.ModelResource):
    warn = fields.Field(widget=widgets.BooleanWidget())

    def before_import_row(self, row, row_number=None, **kwargs):
        if "warn" in row.keys():
            # munge "warn" to "True"
            if row["warn"] in ["warn", "WARN"]:
                row["warn"] = True

        return super().before_import_row(row, row_number, **kwargs)
```

**clean** (*value*, *row=None*, *\*\*kwargs*)  
 Returns an appropriate Python object for an imported value.

For example, if you import a value from a spreadsheet, `clean()` handles conversion of this value into the corresponding Python object.

Numbers or dates can be *cleaned* to their respective data types and don't have to be imported as Strings.

**render** (*value*, *obj=None*)  
 On export, `True` is represented as 1, `False` as 0, and `None/NULL` as a empty string.

Note that these values are also used on the import confirmation view.

**class** `import_export.widgets.DateWidget` (*format=None*)  
 Widget for converting date fields.

Takes optional `format` parameter.

**clean** (*value*, *row=None*, *\*\*kwargs*)  
 Returns an appropriate Python object for an imported value.

For example, if you import a value from a spreadsheet, `clean()` handles conversion of this value into the corresponding Python object.

Numbers or dates can be *cleaned* to their respective data types and don't have to be imported as Strings.

**render** (*value*, *obj=None*)  
 Returns an export representation of a Python value.

For example, if you have an object you want to export, `render()` takes care of converting the object's field to a value that can be written to a spreadsheet.

**class** `import_export.widgets.TimeWidget` (*format=None*)  
 Widget for converting time fields.

Takes optional `format` parameter.

**clean** (*value*, *row=None*, *\*\*kwargs*)

Returns an appropriate Python object for an imported value.

For example, if you import a value from a spreadsheet, `clean()` handles conversion of this value into the corresponding Python object.

Numbers or dates can be *cleaned* to their respective data types and don't have to be imported as Strings.

**render** (*value*, *obj=None*)

Returns an export representation of a Python value.

For example, if you have an object you want to export, `render()` takes care of converting the object's field to a value that can be written to a spreadsheet.

**class** `import_export.widgets.DateTimeWidget` (*format=None*)

Widget for converting date fields.

Takes optional `format` parameter. If none is set, either `settings.DATETIME_INPUT_FORMATS` or `"%Y-%m-%d %H:%M:%S"` is used.

**clean** (*value*, *row=None*, *\*\*kwargs*)

Returns an appropriate Python object for an imported value.

For example, if you import a value from a spreadsheet, `clean()` handles conversion of this value into the corresponding Python object.

Numbers or dates can be *cleaned* to their respective data types and don't have to be imported as Strings.

**render** (*value*, *obj=None*)

Returns an export representation of a Python value.

For example, if you have an object you want to export, `render()` takes care of converting the object's field to a value that can be written to a spreadsheet.

**class** `import_export.widgets.DurationWidget`

Widget for converting time duration fields.

**clean** (*value*, *row=None*, *\*\*kwargs*)

Returns an appropriate Python object for an imported value.

For example, if you import a value from a spreadsheet, `clean()` handles conversion of this value into the corresponding Python object.

Numbers or dates can be *cleaned* to their respective data types and don't have to be imported as Strings.

**render** (*value*, *obj=None*)

Returns an export representation of a Python value.

For example, if you have an object you want to export, `render()` takes care of converting the object's field to a value that can be written to a spreadsheet.

**class** `import_export.widgets.JSONWidget`

Widget for a JSON object (especially required for jsonb fields in PostgreSQL database.)

**Parameters** `value` – Defaults to JSON format.

The widget covers two cases: Proper JSON string with double quotes, else it tries to use single quotes and then convert it to proper JSON.

**clean** (*value*, *row=None*, *\*\*kwargs*)

Returns an appropriate Python object for an imported value.

For example, if you import a value from a spreadsheet, `clean()` handles conversion of this value into the corresponding Python object.

Numbers or dates can be *cleaned* to their respective data types and don't have to be imported as Strings.

**render** (*value*, *obj=None*)

Returns an export representation of a Python value.

For example, if you have an object you want to export, `render()` takes care of converting the object's field to a value that can be written to a spreadsheet.

```
class import_export.widgets.ForeignKeyWidget (model, field='pk',
                                             use_natural_foreign_keys=False,
                                             **kwargs)
```

Widget for a `ForeignKey` field which looks up a related model using either the PK or a user specified field that uniquely identifies the instance in both export and import.

The lookup field defaults to using the primary key (pk) as lookup criterion but can be customised to use any field on the related model.

Unlike specifying a related field in your resource like so...

```
class Meta:
    fields = ('author__name',)
```

...using a `ForeignKeyWidget` has the advantage that it can not only be used for exporting, but also importing data with foreign key relationships.

Here's an example on how to use `ForeignKeyWidget` to lookup related objects using `Author.name` instead of `Author.pk`:

```
from import_export import fields, resources
from import_export.widgets import ForeignKeyWidget

class BookResource (resources.ModelResource):
    author = fields.Field(
        column_name='author',
        attribute='author',
        widget=ForeignKeyWidget (Author, 'name'))

    class Meta:
        fields = ('author',)
```

### Parameters

- **model** – The Model the `ForeignKey` refers to (required).
- **field** – A field on the related model used for looking up a particular object.
- **use\_natural\_foreign\_keys** – Use natural key functions to identify related object, default to `False`

**clean** (*value*, *row=None*, *\*\*kwargs*)

Returns an appropriate Python object for an imported value.

For example, if you import a value from a spreadsheet, `clean()` handles conversion of this value into the corresponding Python object.

Numbers or dates can be *cleaned* to their respective data types and don't have to be imported as Strings.

**get\_queryset** (*value, row, \*args, \*\*kwargs*)

Returns a queryset of all objects for this Model.

Overwrite this method if you want to limit the pool of objects from which the related object is retrieved.

#### Parameters

- **value** – The field’s value in the datasource.
- **row** – The datasource’s current row.

As an example; if you’d like to have ForeignKeyWidget look up a Person by their pre- **and** lastname column, you could subclass the widget like so:

```
class FullNameForeignKeyWidget(ForeignKeyWidget):
    def get_queryset(self, value, row, *args, **kwargs):
        return self.model.objects.filter(
            first_name__iexact=row["first_name"],
            last_name__iexact=row["last_name"]
        )
```

**render** (*value, obj=None*)

Returns an export representation of a Python value.

For example, if you have an object you want to export, *render()* takes care of converting the object’s field to a value that can be written to a spreadsheet.

**class** import\_export.widgets.**ManyToManyWidget** (*model, separator=None, field=None, \*\*kwargs*)

Widget that converts between representations of a ManyToMany relationships as a list and an actual ManyToMany field.

#### Parameters

- **model** – The model the ManyToMany field refers to (required).
- **separator** – Defaults to ', '.
- **field** – A field on the related model. Default is pk.

**clean** (*value, row=None, \*\*kwargs*)

Returns an appropriate Python object for an imported value.

For example, if you import a value from a spreadsheet, *clean()* handles conversion of this value into the corresponding Python object.

Numbers or dates can be *cleaned* to their respective data types and don’t have to be imported as Strings.

**render** (*value, obj=None*)

Returns an export representation of a Python value.

For example, if you have an object you want to export, *render()* takes care of converting the object’s field to a value that can be written to a spreadsheet.



```
class import_export.fields.Field(attribute=None, column_name=None, widget=None, default=<class 'django.db.models.fields.NOT_PROVIDED'>, readonly=False, saves_null_values=True)
```

Field represent mapping between *object* field and representation of this field.

### Parameters

- **attribute** – A string of either an instance attribute or callable off the object.
- **column\_name** – Lets you provide a name for the column that represents this field in the export.
- **widget** – Defines a widget that will be used to represent this field’s data in the export.
- **readonly** – A Boolean which defines if this field will be ignored during import.
- **default** – This value will be returned by `clean()` if this field’s widget did not return an adequate value.
- **saves\_null\_values** – Controls whether null values are saved on the object

**clean** (*data*, **\*\*kwargs**)

Translates the value stored in the imported datasource to an appropriate Python object and returns it.

**export** (*obj*)

Returns value from the provided object converted to export representation.

**get\_value** (*obj*)

Returns the value of the object’s attribute.

**save** (*obj*, *data*, *is\_m2m=False*, **\*\*kwargs**)

If this field is not declared readonly, the object’s attribute will be set to the value returned by `clean()`.





**class** `import_export.instance_loaders.BaseInstanceLoader` (*resource, dataset=None*)  
Base abstract implementation of instance loader.

**class** `import_export.instance_loaders.ModelInstanceLoader` (*resource, dataset=None*)  
Instance loader for Django model.

Lookup for model instance by `import_id_fields`.

**class** `import_export.instance_loaders.CachedInstanceLoader` (*\*args, \*\*kwargs*)  
Loads all possible model instances in dataset avoid hitting database for every `get_instance` call.

This instance loader work only when there is one `import_id_fields` field.



### 13.1 TempFolderStorage

```
class import_export.tmp_storages.TempFolderStorage (name=None, read_mode='r', encoding=None)
```

### 13.2 CacheStorage

```
class import_export.tmp_storages.CacheStorage (name=None, read_mode='r', encoding=None)
```

By default memcache maximum size per key is 1MB, be careful with large files.

### 13.3 MediaStorage

```
class import_export.tmp_storages.MediaStorage (name=None, read_mode='rb', encoding=None)
```



### 14.1 Result

```
class import_export.results.Result(*args, **kwargs)
```

```
    has_errors()
```

Returns a boolean indicating whether the import process resulted in any critical (non-validation) errors for this result.

```
    has_validation_errors()
```

Returns a boolean indicating whether the import process resulted in any validation errors for this result.



```
class import_export.forms.ImportForm(import_formats, *args, **kwargs)
class import_export.forms.ConfirmImportForm(data=None, files=None,
auto_id='id_%s', prefix=None, initial=None, error_class=<class
'django.forms.utils.ErrorList'>,
label_suffix=None,
empty_permitted=False, field_order=None,
use_required_attribute=None, renderer=None)
```





i

`import_export.admin`, 41  
`import_export.forms`, 65  
`import_export.instance_loaders`, 59



## A

`after_delete_instance()` (*import\_export.resources.Resource* method), 45  
`after_export()` (*import\_export.resources.Resource* method), 45  
`after_import()` (*import\_export.resources.ModelResource* method), 48  
`after_import()` (*import\_export.resources.Resource* method), 45  
`after_import_instance()` (*import\_export.resources.Resource* method), 45  
`after_import_row()` (*import\_export.resources.Resource* method), 45  
`after_save_instance()` (*import\_export.resources.Resource* method), 45

## B

`BaseInstanceLoader` (class in *import\_export.instance\_loaders*), 59  
`batch_size` (*import\_export.resources.ResourceOptions* attribute), 49  
`before_delete_instance()` (*import\_export.resources.Resource* method), 45  
`before_export()` (*import\_export.resources.Resource* method), 45  
`before_import()` (*import\_export.resources.Resource* method), 45  
`before_import_row()` (*import\_export.resources.Resource* method), 45  
`before_save_instance()` (*import\_export.resources.Resource* method), 45  
`BooleanWidget` (class in *import\_export.widgets*), 52  
`bulk_create()` (*import\_export.resources.Resource* method), 46  
`bulk_delete()` (*import\_export.resources.Resource* method), 46  
`bulk_update()` (*import\_export.resources.Resource* method), 46

## C

`CachedInstanceLoader` (class in *import\_export.instance\_loaders*), 59  
`CacheStorage` (class in *import\_export.tmp\_storages*), 61  
`CharWidget` (class in *import\_export.widgets*), 52  
`chunk_size` (*import\_export.resources.ResourceOptions* attribute), 49  
`clean()` (*import\_export.fields.Field* method), 57  
`clean()` (*import\_export.widgets.BooleanWidget* method), 52  
`clean()` (*import\_export.widgets.DateTimeWidget* method), 53  
`clean()` (*import\_export.widgets.DateWidget* method), 52  
`clean()` (*import\_export.widgets.DecimalWidget* method), 51  
`clean()` (*import\_export.widgets.DurationWidget* method), 53  
`clean()` (*import\_export.widgets.ForeignKeyWidget* method), 54  
`clean()` (*import\_export.widgets.IntegerWidget* method), 51  
`clean()` (*import\_export.widgets.JSONWidget* method), 53  
`clean()` (*import\_export.widgets.ManyToManyWidget* method), 55  
`clean()` (*import\_export.widgets.TimeWidget* method), 53  
`clean()` (*import\_export.widgets.Widget* method), 51

clean\_model\_instances (*import\_export.resources.ResourceOptions* attribute), 49  
 confirm\_form\_class (*import\_export.admin.ImportMixin* attribute), 42  
 ConfirmImportForm (*class in import\_export.forms*), 65  
 create\_confirm\_form() (*import\_export.admin.ImportMixin* method), 42  
 create\_import\_form() (*import\_export.admin.ImportMixin* method), 42  
**D**  
 DateTimeWidget (*class in import\_export.widgets*), 53  
 DateWidget (*class in import\_export.widgets*), 52  
 DecimalWidget (*class in import\_export.widgets*), 51  
 DEFAULT\_RESOURCE\_FIELD (*import\_export.resources.ModelResource* attribute), 48  
 delete\_instance() (*import\_export.resources.Resource* method), 46  
 DurationWidget (*class in import\_export.widgets*), 53  
**E**  
 exclude (*import\_export.resources.ResourceOptions* attribute), 49  
 export() (*import\_export.fields.Field* method), 57  
 export() (*import\_export.resources.Resource* method), 46  
 export\_admin\_action() (*import\_export.admin.ExportActionMixin* method), 41  
 export\_form\_class (*import\_export.admin.ExportMixin* attribute), 41  
 export\_order (*import\_export.resources.ResourceOptions* attribute), 49  
 export\_template\_name (*import\_export.admin.ExportMixin* attribute), 41  
 ExportActionMixin (*class in import\_export.admin*), 41  
 ExportActionModelAdmin (*class in import\_export.admin*), 41  
 ExportMixin (*class in import\_export.admin*), 41  
**F**  
 Field (*class in import\_export.fields*), 57  
 field\_from\_django\_field() (*import\_export.resources.ModelResource* class method), 48  
 fields (*import\_export.resources.ResourceOptions* attribute), 49  
 for\_delete() (*import\_export.resources.Resource* method), 46  
 force\_init\_instance (*import\_export.resources.ResourceOptions* attribute), 49  
 ForeignKeyWidget (*class in import\_export.widgets*), 54  
 formats (*import\_export.admin.ImportMixin* attribute), 42  
 from\_encoding (*import\_export.admin.ImportMixin* attribute), 42  
**G**  
 get\_actions() (*import\_export.admin.ExportActionMixin* method), 41  
 get\_bulk\_update\_fields() (*import\_export.resources.Resource* method), 46  
 get\_confirm\_form\_class() (*import\_export.admin.ImportMixin* method), 42  
 get\_confirm\_form\_initial() (*import\_export.admin.ImportMixin* method), 43  
 get\_confirm\_form\_kwargs() (*import\_export.admin.ImportMixin* method), 43  
 get\_confirm\_import\_form() (*import\_export.admin.ImportMixin* method), 43  
 get\_diff\_class() (*import\_export.resources.Resource* class method), 46  
 get\_diff\_headers() (*import\_export.resources.Resource* method), 46  
 get\_error\_result\_class() (*import\_export.resources.Resource* class method), 46  
 get\_export\_data() (*import\_export.admin.ExportMixin* method), 41  
 get\_export\_form() (*import\_export.admin.ExportMixin* method), 41  
 get\_export\_form\_class() (*import\_export.admin.ExportMixin* method), 41

<code>get_export_queryset()</code>	( <i>import_export.admin.ExportMixin</i> method), 41	<b>H</b>	<code>has_errors()</code> ( <i>import_export.results.Result</i> method), 63
<code>get_field_name()</code>	( <i>import_export.resources.Resource</i> method), 46		<code>has_export_permission()</code> ( <i>import_export.admin.ExportMixin</i> method), 42
<code>get_fields()</code>	( <i>import_export.resources.Resource</i> method), 46		<code>has_import_permission()</code> ( <i>import_export.admin.ImportMixin</i> method), 43
<code>get_fk_widget()</code>	( <i>import_export.resources.ModelResource</i> class method), 48		<code>has_validation_errors()</code> ( <i>import_export.results.Result</i> method), 63
<code>get_form_kwargs()</code>	( <i>import_export.admin.ImportMixin</i> method), 43	<b>I</b>	
<code>get_import_data_kwargs()</code>	( <i>import_export.admin.ImportMixin</i> method), 43		<code>import_action()</code> ( <i>import_export.admin.ImportMixin</i> method), 43
<code>get_import_form()</code>	( <i>import_export.admin.ImportMixin</i> method), 43		<code>import_data()</code> ( <i>built-in function</i> ), 19
<code>get_import_form_class()</code>	( <i>import_export.admin.ImportMixin</i> method), 43		<code>import_data()</code> ( <i>import_export.resources.Resource</i> method), 46
<code>get_import_form_initial()</code>	( <i>import_export.admin.ImportMixin</i> method), 43		<code>import_export.admin</code> ( <i>module</i> ), 41
<code>get_import_form_kwargs()</code>	( <i>import_export.admin.ImportMixin</i> method), 43		<code>import_export.forms</code> ( <i>module</i> ), 65
<code>get_import_id_fields()</code>	( <i>import_export.resources.Resource</i> method), 46		<code>import_export.instance_loaders</code> ( <i>module</i> ), 59
<code>get_instance()</code>	( <i>import_export.resources.Resource</i> method), 46		<code>import_export_change_list_template</code> ( <i>import_export.admin.ExportMixin</i> attribute), 42
<code>get_m2m_widget()</code>	( <i>import_export.resources.ModelResource</i> class method), 48		<code>import_export_change_list_template</code> ( <i>import_export.admin.ImportExportMixin</i> attribute), 42
<code>get_or_init_instance()</code>	( <i>import_export.resources.Resource</i> method), 46		<code>import_export_change_list_template</code> ( <i>import_export.admin.ImportMixin</i> attribute), 43
<code>get_queryset()</code>	( <i>import_export.resources.ModelResource</i> method), 48		<code>import_field()</code> ( <i>import_export.resources.Resource</i> method), 47
<code>get_queryset()</code>	( <i>import_export.widgets.ForeignKeyWidget</i> method), 54		<code>import_form_class</code> ( <i>import_export.admin.ImportMixin</i> attribute), 43
<code>get_result_class()</code>	( <i>import_export.resources.Resource</i> class method), 46		<code>import_id_fields</code> ( <i>import_export.resources.ResourceOptions</i> attribute), 49
<code>get_row_result_class()</code>	( <i>import_export.resources.Resource</i> class method), 46		<code>import_obj()</code> ( <i>import_export.resources.Resource</i> method), 47
<code>get_value()</code>	( <i>import_export.fields.Field</i> method), 57		<code>import_row()</code> ( <i>import_export.resources.Resource</i> method), 47
			<code>import_template_name</code> ( <i>import_export.admin.ImportMixin</i> attribute), 43
			<code>ImportExportActionModelAdmin</code> ( <i>class in import_export.admin</i> ), 42
			<code>ImportExportMixin</code> ( <i>class in import_export.admin</i> ), 42
			<code>ImportExportModelAdmin</code> ( <i>class in import_export.admin</i> ), 42
			<code>ImportForm</code> ( <i>class in import_export.forms</i> ), 65

ImportMixin (class in *import\_export.admin*), 42  
 init\_instance() (import\_export.resources.ModelResource method), 48  
 init\_instance() (import\_export.resources.Resource method), 47  
 instance\_loader\_class (import\_export.resources.ResourceOptions attribute), 49  
 IntegerWidget (class in *import\_export.widgets*), 51

## J

JSONWidget (class in *import\_export.widgets*), 53

## M

ManyToManyWidget (class in *import\_export.widgets*), 55  
 MediaStorage (class in *import\_export.tmp\_storages*), 61  
 model (import\_export.resources.ResourceOptions attribute), 49  
 ModelInstanceLoader (class in *import\_export.instance\_loaders*), 59  
 ModelResource (class in *import\_export.resources*), 48  
 modelresource\_factory() (import\_export.resources method), 50

## P

process\_import() (import\_export.admin.ImportMixin method), 43

## R

render() (import\_export.widgets.BooleanWidget method), 52  
 render() (import\_export.widgets.DateTimeWidget method), 53  
 render() (import\_export.widgets.DateWidget method), 52  
 render() (import\_export.widgets.DurationWidget method), 53  
 render() (import\_export.widgets.ForeignKeyWidget method), 55  
 render() (import\_export.widgets.JSONWidget method), 54  
 render() (import\_export.widgets.ManyToManyWidget method), 55  
 render() (import\_export.widgets.TimeWidget method), 53  
 render() (import\_export.widgets.Widget method), 51

report\_skipped (import\_export.resources.ResourceOptions attribute), 49  
 Resource (class in *import\_export.resources*), 45  
 ResourceOptions (class in *import\_export.resources*), 49  
 Result (class in *import\_export.results*), 63

## S

save() (import\_export.fields.Field method), 57  
 save\_instance() (import\_export.resources.Resource method), 47  
 save\_m2m() (import\_export.resources.Resource method), 47  
 skip\_diff (import\_export.resources.ResourceOptions attribute), 49  
 skip\_html\_diff (import\_export.resources.ResourceOptions attribute), 49  
 skip\_row() (import\_export.resources.Resource method), 47  
 skip\_unchanged (import\_export.resources.ResourceOptions attribute), 50  
 store\_row\_values (import\_export.resources.ResourceOptions attribute), 50

## T

TempFolderStorage (class in *import\_export.tmp\_storages*), 61  
 TimeWidget (class in *import\_export.widgets*), 52  
 to\_encoding (import\_export.admin.ExportMixin attribute), 42

## U

use\_bulk (import\_export.resources.ResourceOptions attribute), 50  
 use\_natural\_foreign\_keys (import\_export.resources.ResourceOptions attribute), 50  
 use\_transactions (import\_export.resources.ResourceOptions attribute), 50  
 using\_db (import\_export.resources.ResourceOptions attribute), 50

## V

validate\_instance() (import\_export.resources.Resource method), 48

## W

Widget (*class in import\_export.widgets*), 51

widget\_from\_django\_field() (*import\_export.resources.ModelResource class method*), 48

widget\_kwargs\_for\_field() (*import\_export.resources.ModelResource class method*), 49

widgets (*import\_export.resources.ResourceOptions attribute*), 50